

Science@ifpen

Issue 30 - October 2017

SPECIAL ISSUE
Control and optimization
of complex systems

The control of floating platforms for offshore wind turbines: being active reduces fatigue



It is commonly accepted that the continuous increase in computer performance, combined with the progress of mathematical algorithms, has led to unprecedented developments in the numerical simulation of complex physical phenomena. But these enhanced computing capabilities have also revolutionized our approach to complex systems, enabling us to optimize and command them and, ultimately, to better influence the way equipment is operated and managed.

This issue, dedicated to "Optimization and command of complex systems", provides a non-exhaustive overview of such IFPEN's research activities for applications in the field of energy: floating offshore wind turbines, reservoir management, chemical engineering processes, the operation of engines and energy recovery.


Lastly, let's not forget that optimization techniques are crucial for handling the huge amounts of data derived from experimental measurements, numerical calculations and computing. This opens the way to another of IFPEN's fundamental research themes: the optimal processing of massive data flows.

I hope you enjoy reading this issue.

Grégoire Allaire,
Chairman of IFPEN's Scientific Board

The fatigue resistance of floating offshore wind turbines is significantly affected by the wave forces to which their supporting platforms are exposed. Passive and active damper systems — preferably inexpensive — are thus being sought to mitigate these effects.

Existing solutions such as U-shaped column tubes, based on the principle of the dynamic transfer of water reserves (acting as moving masses), are passive and unsuited to the changing wave direction.

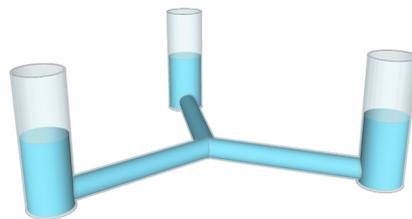


To overcome these difficulties, researchers at IFPEN have come up with a multi-directional, star-shaped damper system that was first modeled and for which an active control law has been proposed^[1-3]. This control is based on the continuous management of the size of the restrictions (fixed in the passive version) inside the pipes, making it possible to restrict natural water flow between the reservoirs.

The proposed system helps mitigate the effects of the wave irrespective of its direction. In the active version, the control law developed generates levels

of performance that are much higher than those of the passive version (figure).

There is still room for variations of this system to lead to further improvements, both in terms of platform design and control during operation. It would be possible, for example, to add and manage links between air columns or optimize the calibration for a given production site as a function of its wind and swell characteristics. ■

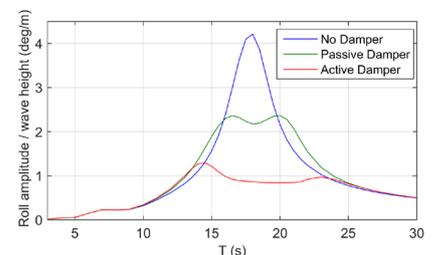

Movement control with damper systems (passive and active) for monochromatic wave agitation.

[1] O. Lepreux & C. Coudurier, Patent 3048409, 2017

[2] C. Coudurier, O. Lepreux, N. Petit, Proc. of 10th IFAC Conference on Manoeuvring and Control of Marine Craft, MCMC, 2015

[3] C. Coudurier, O. Lepreux, N. Petit, submitted to Journal of Ocean Engineering

Scientific contact:
olivier.lepreux@ifpen.fr

IFP Energies nouvelles (IFPEN) is a major research and training player in the fields of energy, transport and the environment. From research to industry, technological innovation is central to all its activities.



Exhaust gas heat: optimal recovery through supervision and control

Recovering heat from exhaust gases using the Rankine thermodynamic cycle^a is one of the avenues being explored to reduce the energy consumption of IC engines.

Tried and tested for stationary applications, such as power plants, this technology becomes highly complex for transport applications due to extremely transient operating conditions, making an efficient supervision and control system essential.


Three application scenarios have been considered by IFPEN's teams: light-duty vehicles, trucks and diesel-electric railcars^b. For each scenario, the design of a pilot Rankine system required new model-based control developments:

- for the control of superheating at the evaporator outlet (figure): a new non-linear command law, enabling temperature and pressure control, was proposed;
- for the energy supervision of the Rankine system: a dynamic optimization approach, enabling the calculation

of control setpoints as a function of operating conditions, was developed to maximize energy efficiency.

Experimental validation of the system demonstrated that it could be maintained in conditions enabling continuous energy recovery, even over highly dynamic road cycles⁽¹⁾. It was thus verified that the improvement in energy saving associated with real-time dynamic optimization was significant compared to existing technology (+ 7%)⁽²⁾.

This pioneering work now represents a benchmark in the sector of Rankine system control. ■

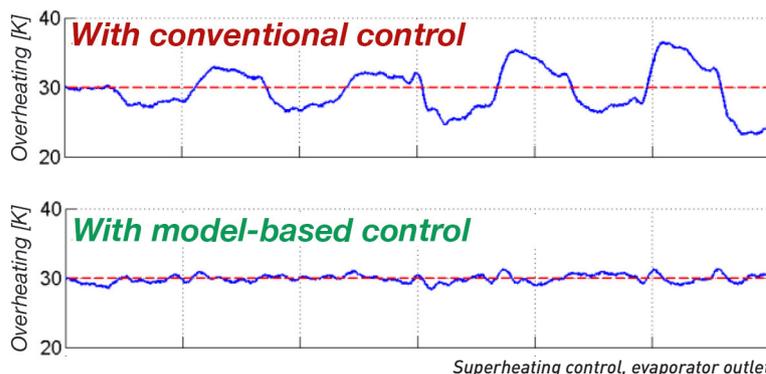

- a - Adiabatic cycle enabling the conversion of heat into mechanical work.
- b - The latter have been the focus of co-development with Enogia.

(1) J. Peralez, M. Nadri, P. Dufour, P. Tona, A. Sciarretta. *IEEE Transactions on Control Systems Technology*, 2017, 25(3), pp. 952 - 965. DOI: 10.1109/TCST.2016.2574760

(2) J. Peralez, P. Tona, M. Nadri, P. Dufour, A. Sciarretta. *Journal of Process Control*, vol. 33, 2015, pp. 1-13, ISSN 0959-1524. DOI: 10.1016/j.jprocont.2015.03.009

Scientific contact:
paolino.tona@ifpen.fr

Optimized placements for long lasting resources


In the face of declining oil and gas reserves, increasing the productivity of oil fields has become a technological challenge of the utmost importance. Accordingly, well positioning and trajectory are critical factors and industry is seeking to acquire advanced methods to optimize well placement during field development.

This development phase relies on the simulation of fluid flows in the reservoir to determine well position, trajectory and type. Optimization consists in maximizing an objective NPV (Net Present Value) function incorporating field production gains and drilling costs, based on calculations derived from simulation outputs for each well (water, oil and gas production). The mixed nature of the optimization variables (continuous, integer, binary), the non-linearities of the NPV function and the associated calculation cost add considerably to the complexity of this problem.

IFPEN thus developed a two-step methodology consisting in^(1,2):

- determining the position and type of vertical wells only, thereby reducing the number of variables. This makes it possible to tackle a mixed, non-linear problem (with integer and continuous variables) using a global direct search method, based on numerical simulations;
- optimizing the trajectories of the branches coming off vertical wells, using a simplified analytical model.

This sequential optimization approach enables resolution via adaptations of traditional MINLP (Mixed Integer Non Linear Programming) methods. It can also be considered for the purposes of determining dates for bringing a well into production or closing down a well, or the implementation of adapted strategies once a well's profitability starts to decline. ■

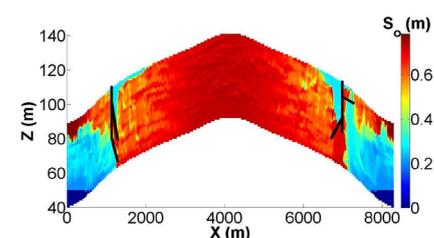

2D example of optimized trajectories for 2 producer wells (in black).

(1) C. Lizon, 2016, *Mixed nonlinear optimization for integer and real variables: application to well location problem in reservoir engineering*, PhD thesis, École polytechnique.

(2) C. Lizon, C. D'Ambrosio, M. Le Ravalec, L. Liberti, and D. Sinoquet, *Proc. 14th European Conference on the Mathematics of Oil Recovery (ECMOR)*, 2014.

Scientific contact:
delphine.sinoquet@ifpen.fr

Optimized design of processes: enhanced efficiency, even with ethanol

The optimized design of processes is a complex but promising approach in terms of the expected benefits for the efficiency of industrial systems and their operating performance. It is an area that was the focus of a PhD thesis⁽¹⁾ conducted in partnership with the École polytechnique fédérale de Lausanne (EPFL), based on an example relating to alternative fuels: the production of bioethanol from sugarcane and its leaves, associated with cogeneration. The objective was to reduce the energy consumption of the unit, while maximizing the export of surplus energy⁽¹⁻²⁾.

The optimization strategy consisted in considering the process as a whole, i.e. simultaneously: the sequence of equipment (reactors, exchangers, distillation columns), the network of utilities (steam and electricity) and operating conditions (temperatures, pressures, etc.). In order to implement this strategy, it was necessary to model and simulate the entire process and the production of utilities. A few figures illustrate the complexity of the problem: 28 equipment optimization variables, 50 material flows to be thermally integrated and 75 pieces of equipment.

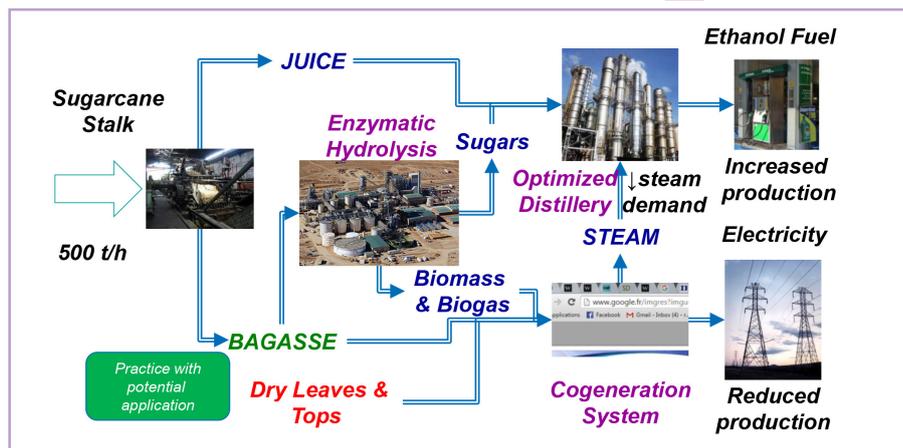


Diagram showing an ethanol production and heat/electricity cogeneration process.

As a multi-objective optimization, it was possible to generate the full range of solutions regarding economic and energy compromise associated with one or several of the “objective” functions defined by the user.

The research demonstrated that it was possible to increase global energy efficiency by 7% and electricity production by 20%⁽¹⁾, while maintaining the same level of ethanol production. ■

(1) R. Bechara, *Methodology for the multi-objective optimization of processes: application to ethanol and power production from sugarcane*, PhD thesis, universit  Lyon 1 (2015)

(2) R. Bechara, A. Gomez, V. Saint-Antonin, J-M. Schweitzer, F. Mar chal, *Energy* 117 (2016). DOI: 10.1016/j.energy.2016.07.018

Scientific contact:
adrien.gomez@ifpen.fr

Floating wind turbine: increasing reliability in an “ocean of possibilities”

The optimal design of mechanical structures is hampered by the imperfect knowledge of the environmental conditions under which they will operate. The systematic incorporation of the resulting uncertainties currently relies on the intensive use of complex simulators. Under this constraint, IFPEN is designing wind turbine anchoring technologies and floaters that reconcile operating robustness and cost with a view to large-scale production.

Since simulation based optimization can be costly in terms of calculation time, researchers are working on a more “economic” exploration of possibilities, particularly concerning environmental conditions. Moreover, the relative scarcity of failures implies that the simulated cases need to be sufficiently numerous to expect the observation of such phenomena and to adapt the design of the structure accordingly.

These two challenges were tackled respectively:

- using dimension reduction techniques, for random processes modeling environmental conditions,
- and using accelerated Monte-Carlo simulation methods, to reduce the number of scenarios required to estimate the probability of failure⁽¹⁾.

In addition, since the optimization constraints involve the probability of failure, and the resolution method employed requires the calculation of their derivative, further work was conducted in this respect⁽²⁾.

Lastly, still with the aim of reducing calculation times, an alternative was applied to the design of an offshore wind turbine anchoring solution, resistant to fatigue: using probability constraint approximations based on the theory of extreme values.



Thereby, through the provision and introduction of new methodologies, but also computing equipment and algorithms, IFPEN is helping to improve design tools for floating wind turbine supports, working closely with industrial players in the sector. ■

(1) A. Murangira, M. Munoz Zuniga, T. Perdrizet. <https://hal.archives-ouvertes.fr/hal-01230454/document>, 2015.

(2) W. van Ackooij, I. Aleksovska, M. Munoz Zuniga. *Submitted to Set-Valued and Variational Analysis*, 2017.

Scientific contact:
miguel.munoz-zuniga@ifpen.fr


Energy in vehicles: we've got it under control!

In hybrid vehicles, onboard algorithms are aimed at splitting power between the various energy sources in order to minimize fuel consumption and/or pollutant emissions. This real-time management requires a dynamic optimization approach (or optimal control).

As part of a thesis project^(1, 2), IFPEN developed an energy management optimization method incorporating the internal temperatures of the engine and/or the gas after-treatment system, – which represent dynamic states not taken into account by state-of-the-art optimized management systems^a.

Initially, based on prior knowledge of the driving cycle, management laws were determined using the Pontryagin Minimum Principle^b. Based on the numerical results, a compromise was established between the optimality of the management system and the complexity of the model used. For each of the different cases studied, the impact of the simplification implemented was estimated using regular perturbation theory for optimal control.

During a second phase, the ECMS method was enhanced by incorporating new thermal dynamics. This led to the development of sub-optimal strategies – not dependent on knowledge of the

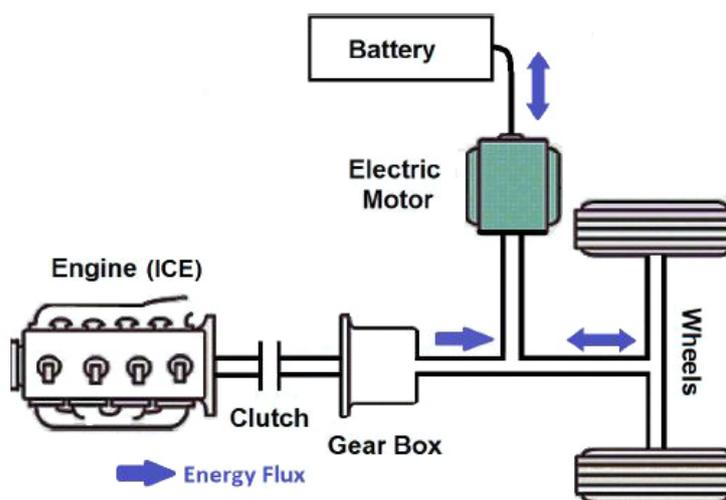

Energy flow in a hybrid vehicle, to be controlled by the onboard management system.

driving cycle, – which were then validated numerically and experimentally.

The method developed could be extended to other optimal control problems, either multi-state or, more generally, complex. ■

[1] D. Maamria, A. Sciarretta, F. Chaplais, N. Petit (2017), in Proc. of the IFAC World Congress, Toulouse, France, 9-14 Jul. 2017.

[2] D. Maamria, F. Chaplais, N. Petit, A. Sciarretta (2015), Proc. of the American Control Conf. (ACC), Chicago, IL, 1-3 Jul. 2015. DOI: 10.1109/ACC.2015.7171183

a - based on the ECMS (Equivalent Consumption Minimization Strategy) method in which the unknown equivalent cost of electricity (adjoint state) is calculated as a function of the measured battery charge (state).

b - mathematical principle used to specify the conditions required for optimality.

Scientific contact:
antonio.sciarretta@ifpen.fr

News

- IFP Energies nouvelles' Oil & Gas Science and Technology journal (OGST) notched up 1,555 article quotations in 2016, giving it a two-year impact factor of 1.184, up from 1.087 in 2015. The five-year impact factor remains stable at 1.361. In the "Engineering, Petroleum" category, the journal is ranked 8th (out of 21) and 2nd for open access journals.

- IFP School is ranked 5th in 2017 among the world's best engineering schools and universities for oil, gas and petroleum engineering, according to CEO World Magazine.

Scientific visitor

- **Ardalan Vahidi**, associate professor in the Faculty of Mechanical Engineering at Clemson University (USA), was hosted by the Mechatronics, Computer Science and Applied Mathematics Division as a scientific visitor. During his stay, he worked on driving control in a connected and/or driverless vehicle with a view to achieving greater energy efficiency.

Award

- An article entitled "Scale-up agitation criteria for *Trichoderma reesei* fermentation", written by IFPEN researchers, will be published on the front page of the December issue of the journal *Chemical Engineering Science*.

Upcoming scientific events

- **C2E-Colloids and Complex Fluids for Energies** scientific conference, 4 to 6 December, Rueil-Malmaison – www.rs-colloids2017.com/

- **Scienc'Innov Workshop on the theme "Learning from Scientific Data in Energy"**, 16 and 17 January 2018, Rueil-Malmaison – www.ws-datascien2018.com

Managing Editor: Marco De Michelis
Editor-in-chief: Éric Heintzé
Editorial committee: Xavier Longaygue, Laurent Forti, Benjamin Herzhaft
Graphic Design: Esquif
ISSN No. 1957-3537

Contacts:

Scientific Management: Tel. : +33 1 47 52 51 37 - Science@ifpen.fr
Press: A.-L. de Marignan - Tel. : +33 1 47 52 62 07

1 et 4, avenue de Bois-Préau - 92852 Rueil-Malmaison Cedex - France